




◆ FL42 Series

Product Features:

- A. Adjustable projecting direction;
- B. With die-casting ADC-12 material, the new Agility flood light has a superb heat dissipation and long lifespan;
- C. VDE/UL listed 3*1.0mm² rubber cable with cold-pressed terminal;
- D. Lumileds3030 or Lumileds5050 chips for option, with efficacy 150lm/W or above, 50% less power consumption than traditional light;
- E. The combinations of different drivers, mounting brackets, modules and baffles allow the quickly assembly at customers' request;
- F. With different LED chips and lens, to reach various optic system, such 30°/45°/60°/90°/80x140° or Asymmetric 60°, to match with different applications.

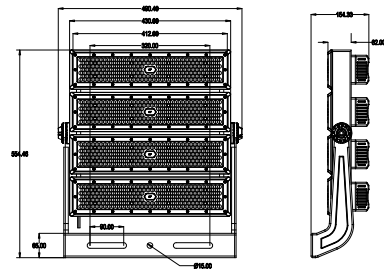

1000W

Applications:

Widely used for big areas like square, warehouse, workshop, shelf, supermarket, seaport, indoor or outdoor stadium field and etc.

Technical Parameters:

Model No.	Power (W)	LED type	S&P for module	Input Volt (V)	PF	CRI	Lumen (LM/W)	Beam Angle	CCT (K)	IP	Size (mm)		
											L	W	H
FL42-200W	200			100~277	>0.95	70			3000-6500K	IP66	490	150	141
FL42-400W	400			100~277	>0.95	70			3000-6500K	IP66	490	315	154
FL42-600W	600			100~277	>0.95	70			3000-6500K	IP66	490	428	154
FL42-800W	800	SMD3030 or SMD5050	28P8S@SMD3030	100~277	>0.95	70	>140LM/W @SMD3030	30°/45°/60°	3000-6500K	IP66	490	554	154
FL42-1000W	1000		44P2S@SMD5050	100~277	>0.95	70	>150LM/W @SMD5050	/90°/80x140° or Asymmetric 60°	3000-6500K	IP66	490	667	154
FL42-1200W	1200			100~277	>0.95	70			3000-6500K	IP66	520	776	154
FL42-1400W	1400			100~277	>0.95	70			3000-6500K	IP66	520	889	154
FL42-1600W	1600			100~277	>0.95	70			3000-6500K	IP66	520	1002	154

